



1		2		3		4		5		6		7		8	
REVISIONS															
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE													

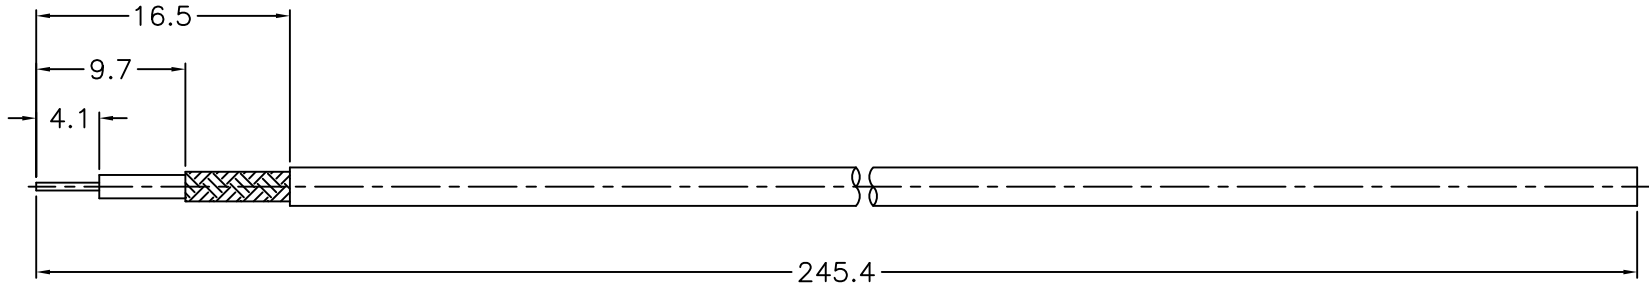

RECOMMENDED  
CABLE STRIPPING DIM'S  
(建議剝線尺寸)

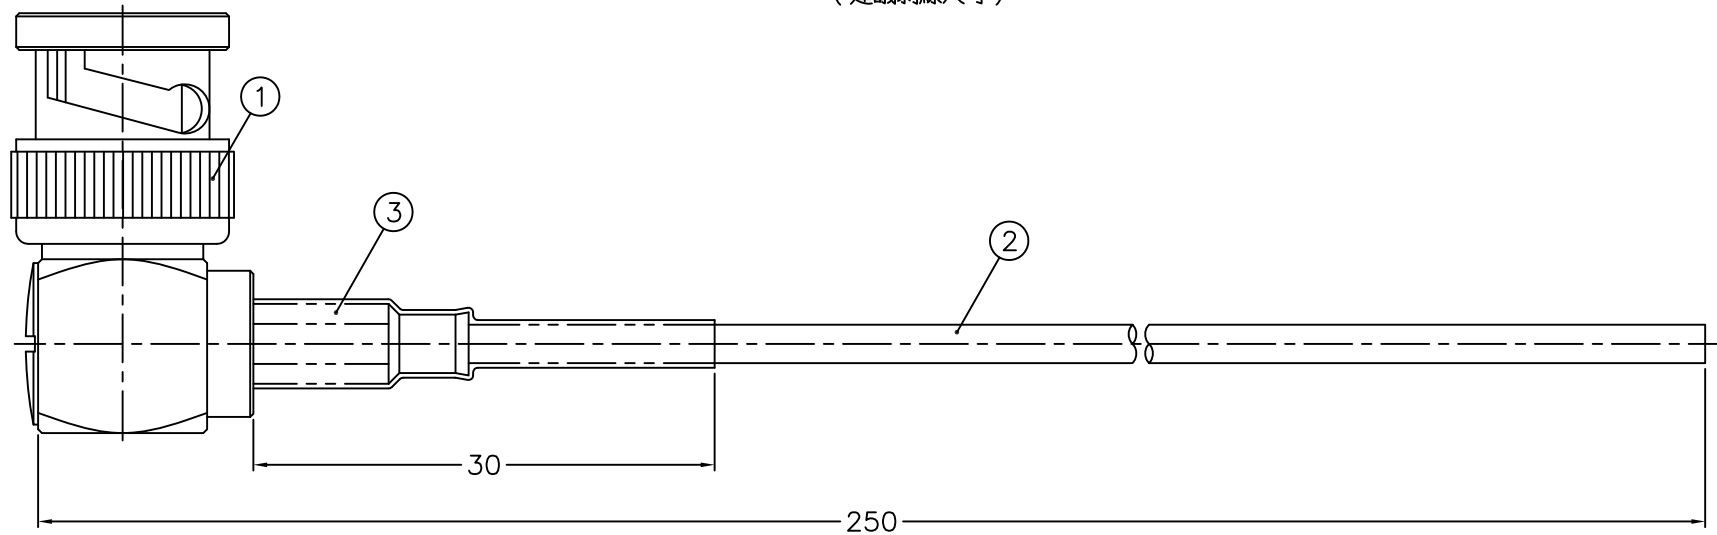

RoHS COMPLIANT

3					HEAT SHRINK TUBING				BLACK	1	ø5X30mmL	DIMENSIONS ARE IN MILLIMETERS				PART NO. CAB-160601003-250				G.L.I.									
2					RG-174/U CCS				CABLE	1	245.4mmL	UNLESS OTHERWISE SPECIFIED TOLERANCES				APPROVED								DATE 06-20-'16					
1					BNC R/A CRIMP PLUG				BRASS	NICKEL	1	900-1112B3-02-50D	0.5-6 = ±0.2				CHECKED				DATE 06-20-'16								
													6-30 = ±0.4				DRAWN				DATE 06-20-'16								
													30-120 = ±0.6								TITLE BNC CABLE								
													120-315 = ±1								DRAWING NO. 250mm CABLE (RG-174/U CCS)								
													315-1000 = ±1.6								FILE NO. R:\D\G\DWG\CABLE\BNC\02\CAB-160601003-250								
													1000-2000 = ±2.4																
NO.					DESCRIPTION					MATERIAL		FINISH		Q'TY		DRAWING NO.		SCALE		2/1		ISSUE		A					