



		1		2		3		4		5		6		7		8	
REVISIONS																	
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE															

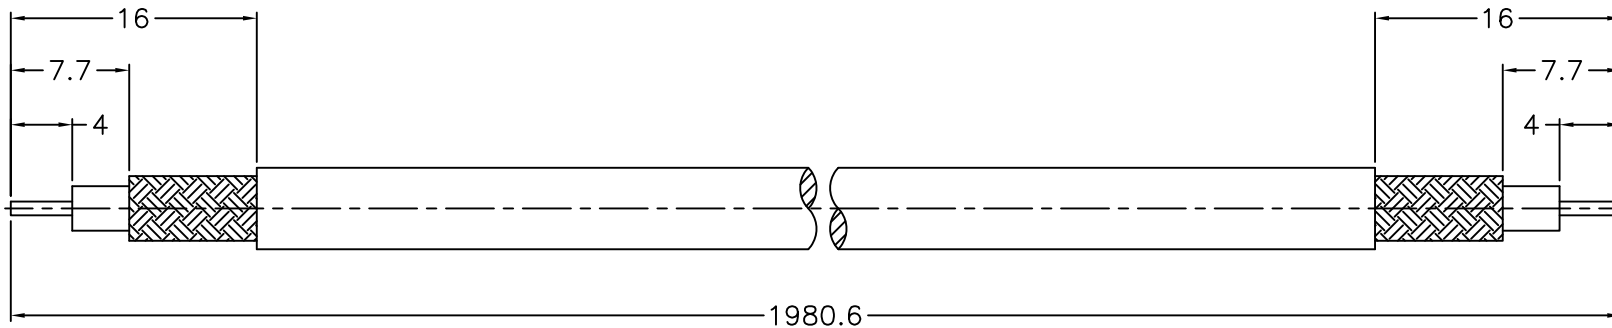

RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)

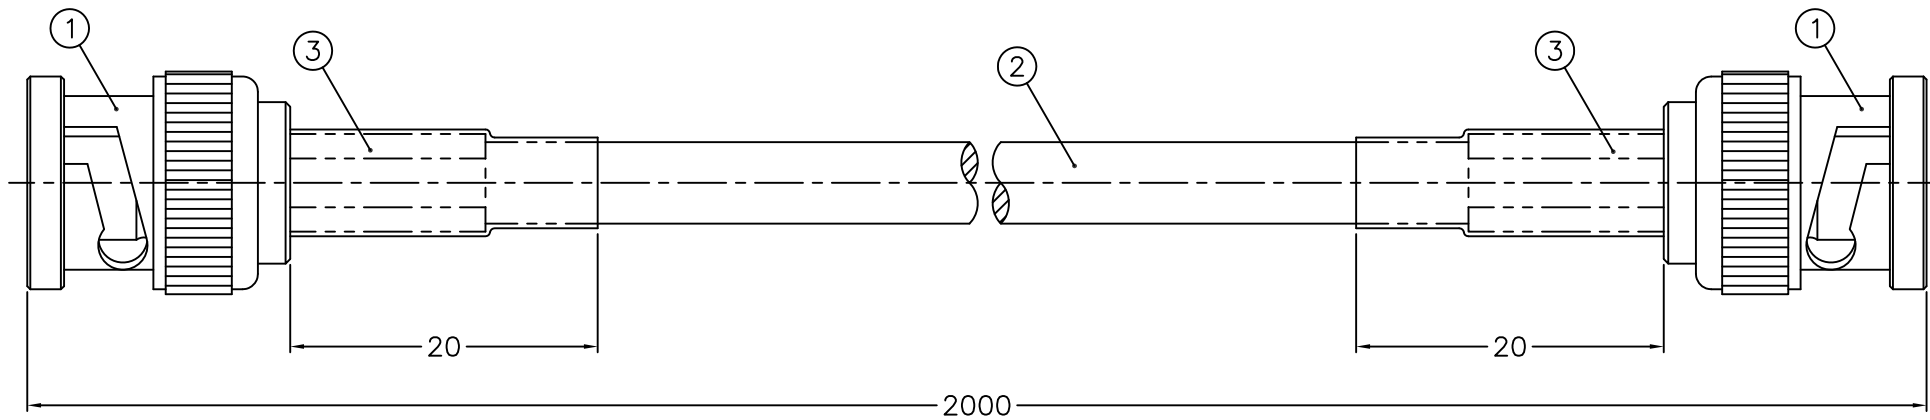

RoHS COMPLIANT

					DIMENSIONS ARE IN MILLIMETERS				PART NO.				G.L.I.			
					UNLESS OTHERWISE SPECIFIED TOLERANCES				CAB-160601008-2M							
					0.5-6 = ±0.2				APPROVED				DATE 07-15-'16			
					6-30 = ±0.4				CHECKED				DATE 07-15-'16			
					30-120 = ±0.6				DRAWN				DATE 07-15-'16			
					120-315 = ±1								TITLE			
					315-1000 = ±1.6								BNC-BNC CABLE			
					1000-2000 = ±2.4								DRAWING NO.			
													2000mm CABLE (RG-58/U)			
													FILE NO. R:\D\G\DWG\CABLE\BNC-BNC\06\CAB-160601008-2M			

3	HEAT SHRINK TUBING	BLACK		2	ø6.5X20mmL
2	RG-58/U	CABLE		1	1980.6mmL
1	BNC CRIMP PLUG	BRASS	NICKEL	2	900-1121A1-06-50D
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.

SCALE	2/1	ISSUE	A
-------	-----	-------	---

1 2 3 4 5 6 7 8

F

E

D

C

B

A

F

E

D

C

B

A