



1		2		3		4		5		6		7		8	
REVISIONS															
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE													

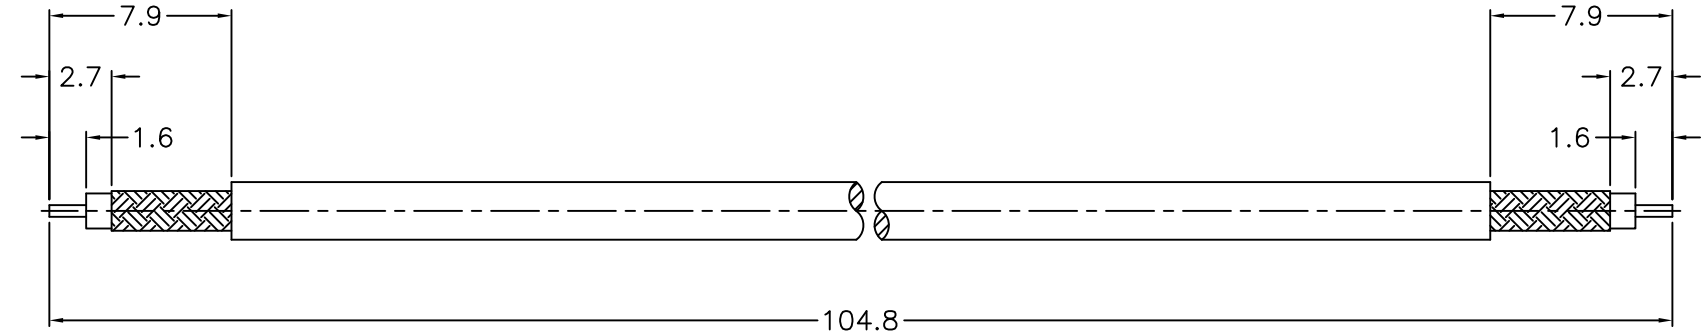

RECOMMENDED  
CABLE STRIPPING DIM'S  
(建議剝線尺寸)

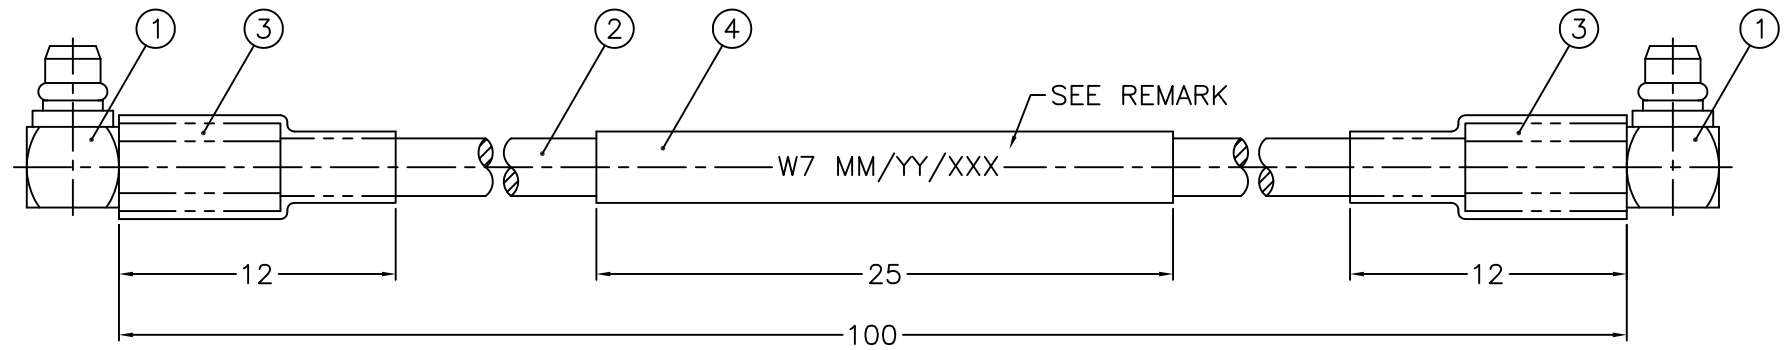

REMARK:"MM" 表出貨月, "YY" 表年份, "XXX" 表流水號  
如 2017 年元月出貨的第一條成品, 即為 01/17/001

RoHS COMPLIANT

					DIMENSIONS ARE IN MILLIMETERS				PART NO.			<b>G.L.I.</b>			
					UNLESS OTHERWISE SPECIFIED TOLERANCES				CAB-170221007-100						
4	LABEL		WHITE	1	Ø3X25mmL	0.5-6 = ±0.2				APPROVED	DATE	TITLE			
3	HEAT SHRINK TUBING		BLACK	2	Ø4X12mmL	6-30 = ±0.4					03-08-'17	MMCX-MMCX CABLE			
2	RG-179/U	CABLE		1	104.8mmL	30-120 = ±0.6				CHECKED	DATE	DRAWING NO.			
1	MMCX R/A CRIMP PLUG	BRASS	GOLD	2	200-1112A1-02-50	120-315 = ±1					03-08-'17	100mm CABLE (RG-179/U)			
						315-1000 = ±1.6				DRAWN	DATE	FILE NO. R:\D\G\DWG\CABLE\MMCX-MMCX\02\CAB-170221007-100			
						1000-2000 = ±2.4					03-08-'17				
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.	SCALE	3/1	ISSUE	A						