

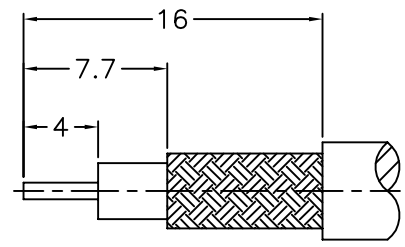
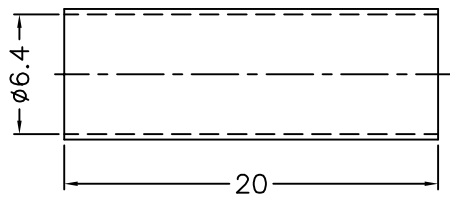
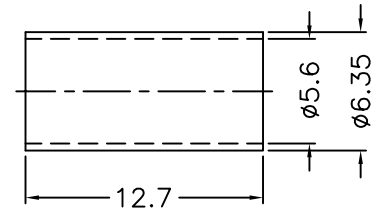


1 2 3 4 5 6 7 8

REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE

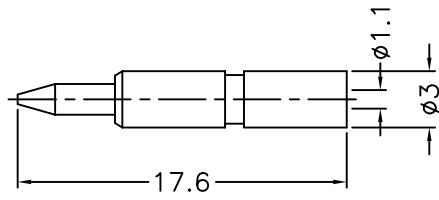

RECOMMENDED
CABLE STRIPPING DIM'S

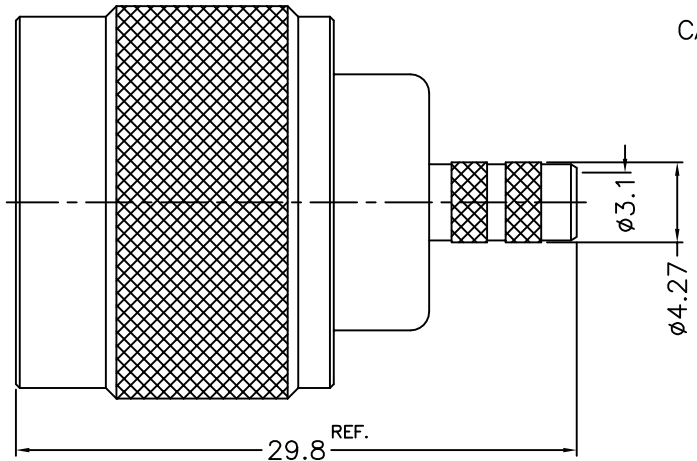


NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
 1. BRASS
 2. NICKEL PL. 100 MIN. THICK OVER COPPER PL. 50 MIN. THICK
 3. PHOSPHOR BRONZE
 4. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 50 MIN. THICK OVER COPPER PL. 50 MIN. THICK
 5. TEFLON

1. CRIMPED FERRULE
2. HEX. CRIMP SIZE .213"
3. CONTACT PIN TO SOLDER

10	HEAT SHRINK TUBING	WITH GLUE	BLACK	1	GHT-64-200L
9	FERRULE	NOTE 1	NOTE 2	1	FR-56-635-127
8	CONTACT PIN	NOTE 1	NOTE 4	1	5824-1000-8-1.1
7	RETAINER RING	NOTE 3	NATURAL	1	5824-1000-7
6	GASKET	SILICONE	RED	1	GS-80-156-15
5	CONTACT BODY	NOTE 1	NOTE 2	1	5824-1000-5
4	INSULATOR	NOTE 5	NATURAL	1	5824-1000-4
3	BARREL	NOTE 1	NOTE 2	1	5824-1121A1-3-07
2	BODY	NOTE 1	NOTE 2	1	5824-1000-2
1	SHELL	NOTE 1	NOTE 2	1	5824-1000-1
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.

DIMENSIONS ARE IN MILLIMETERS
 UNLESS OTHERWISE SPECIFIED TOLERANCES
 0.5-6 = ±0.2
 6-30 = ±0.4
 30-120 = ±0.6
 120-315 = ±1
 315-1000 = ±1.6
 1000-2000 = ±2.4

PART NO.		
N-1121A1-07-50		
APPROVED	DATE	
	04-01-'14	
CHECKED	DATE	TITLE
	04-01-'14	N CRIMP PLUG (FOR RG-55/U,142A/U,223/U,400/U)
DRAWN	DATE	DRAWING NO.
	04-01-'14	5824-1121A15-07-50
FILE NO.		R:\D\G\DWG\5824\1121A15\07\50

1 2 3 4 5 6 7 8

F
E
D
C
B
A

F
E
D
C
B
A